

Content

Wool 100%

Flame Resistance

NFPA 260 (UFAC Class 1)
EN1021 1/2
British Standard 5852:
1990 Source 5 (crib 5)

Lightfastness


ISO 4

Abrasion


40,000 rubs
Martindale method

Maintenance

Clean with solvent-based
cleaning agent

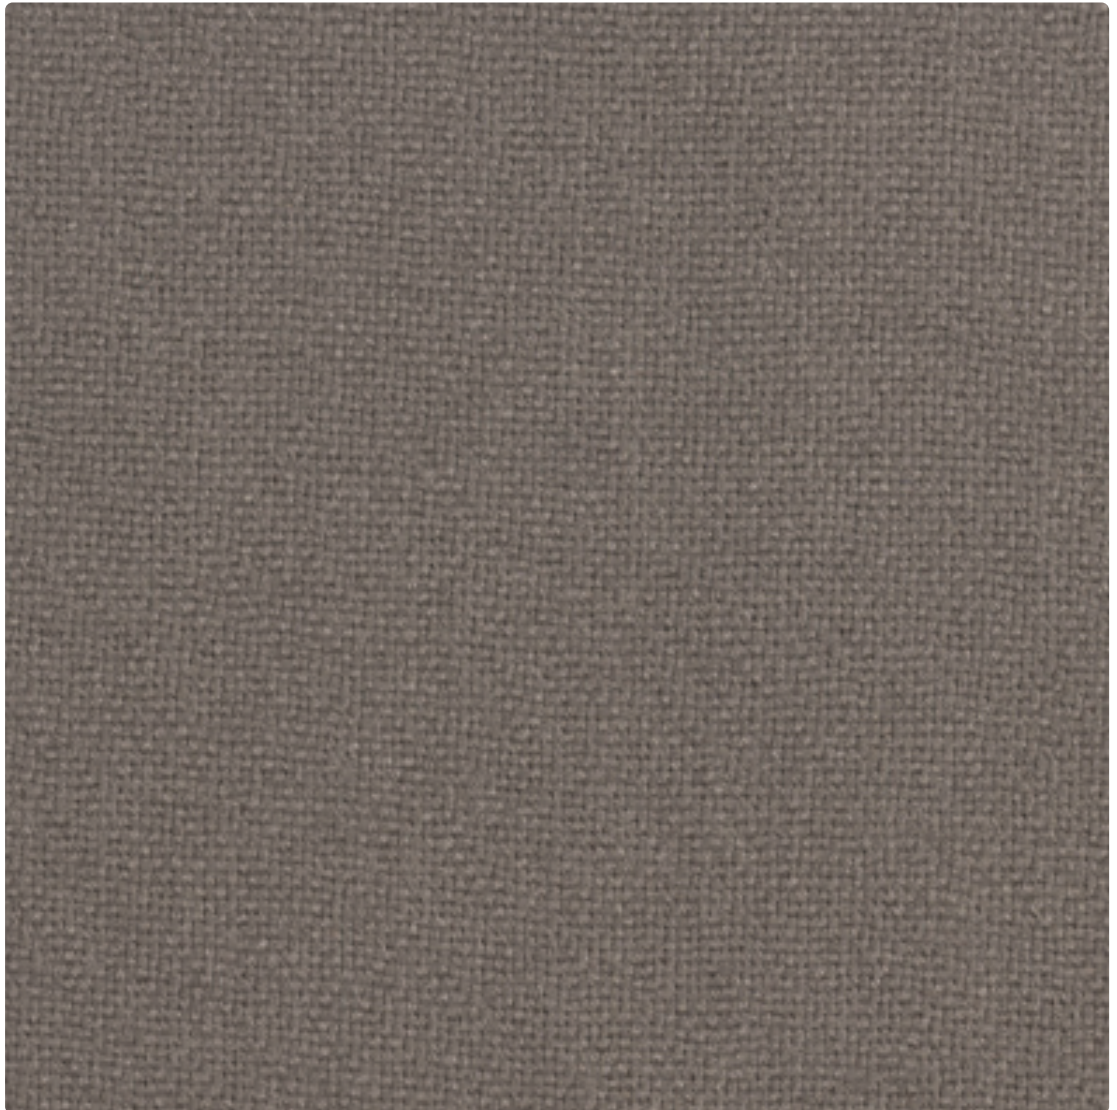

K120613 Putty



K12061 Buff



K12062 Stucco



K12063 Celery



K12064 Lime



K12065 Olive



K12066 Gold

Content

Wool 100%

Flame Resistance

NFPA 260 (UFAC Class 1)

EN1021 1/2

British Standard 5852:

1990 Source 5 (crib 5)

Lightfastness

ISO 4


Abrasion

40,000 rubs


Martindale method

Maintenance

Clean with solvent-based
cleaning agent



K12067 Orange



K12068 Melon



K12069 Magenta



K120610 Red




K120611 Admiral



K120612 Navy



K120616 Black



K120614 Silver



K120615 Charcoal