

**Content**

Acrylic 45%  
Cotton 19%  
Flax 12%  
Polyester 12%  
Viscose 12%

**Flame Resistance**

California Technical  
Bulletin 117  
EN1021 1/2  
British Standard 5852:  
1990 Source 5 (crib 5)

**Lightfastness**

ISO 4/5

**Abrasion**


30,000 rubs  
Martindale method

**Maintenance**

Clean with solvent-based  
cleaning agent



01FED White

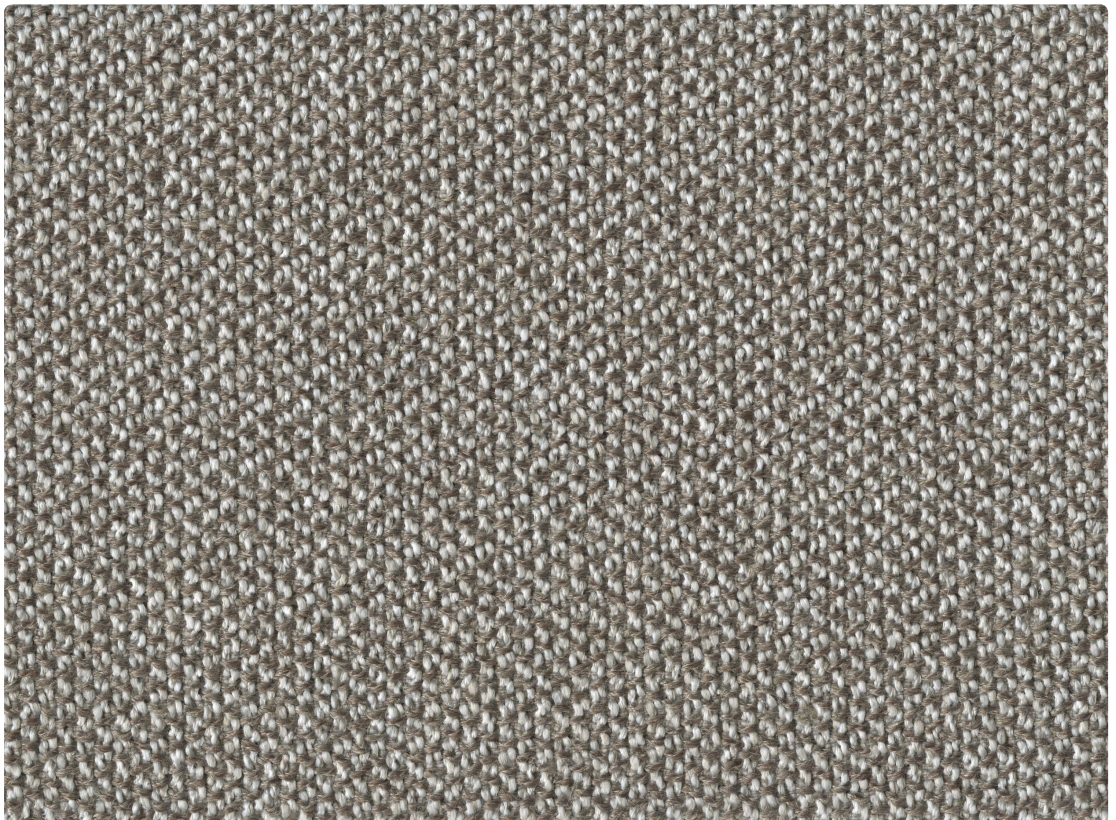

03FED Sand